
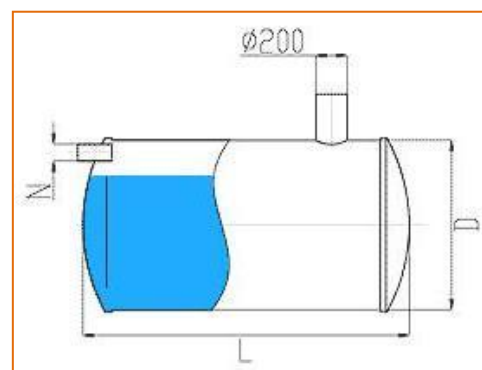


### Габариты накопительных емкостей Helyx (производство Россия).

	D=1100	D=1500	D=2000	D=2500	D=3200
L=1750		3000/110			
L=2100	2000/110				
L=2300		4000/110			
L=2600			8000/110		
L=2850		5000/110			
L=3100	3000/110				
L=3250			10000/110		
L=3450		6000/110			
L=3850			12000/110		
L=4000	4000/110				
L=4100				20000/160	
L=4600		8000/110			
L=4800			15000/160		
L=5000	5000/110				40000/160
L=5100				25000/160	
L=5700		10000/110			
L=6000	6000/110				
L=6200				30000/160	
L=6300					50000/200
L=6400			20000/160		
L=6900		12000/110			55000/200
L=7500					60000/200
L=8000			25000/160		
L=8200				40000/160	
L=8600		15000/160			
L=8750					70000/200
L=9600			30000/160		
L=10000					80000/200
L=10200				50000/200	
L=11300				55000/200	
L=12250				60000/200	
L=12500					100000/200
L=12800			40000/160		
L=14300				70000/200	

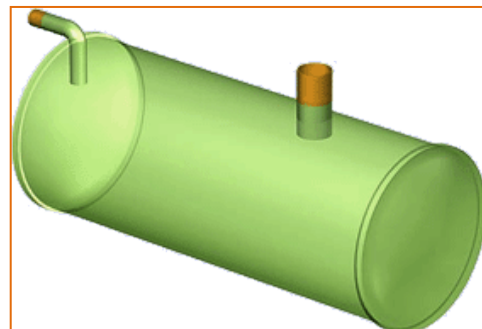

2000/110 ⇔ объем 2000л / диаметр патрубков 110мм